





## Technical Data Sheet M50 Frameless Stainless Steel Mirror

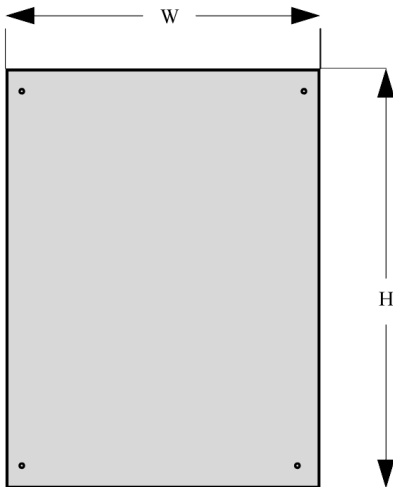

Front of Mirror

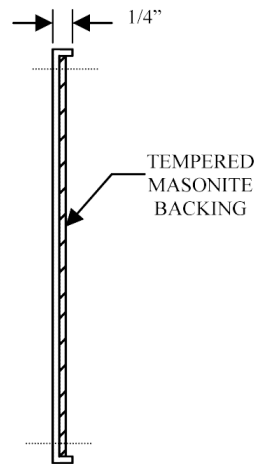

Side of Mirror

STANDARD SIZES	
Width x Height	
16" x 20"	(41 x 51 cm)
16" x 24"	(41 x 61 cm)
18" x 24"	(46 x 61 cm)
18" x 30"	(46 x 76 cm)
24" x 30"	(61 x 76 cm)
24" x 36"	(61 x 91 cm)

### MATERIALS:

**Mirror** – 22 gauge (0.8 mm), type 430 stainless steel with bright polished finish. Mirror has 1/4" (0.6 mm) return.

**Backing** – 1/4" (0.6 mm) thick tempered masonite.

### INSTALLATION:

Mount mirror on wall with screws, furnished by manufacturer. For plaster or drywall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws furnished. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws furnished, or provide 1/8" (3 mm) toggle bolts or expansion bolts.

### SPECIFICATION:

Frameless stainless steel mirror shall be type 430 stainless steel with bright polished finish. Mirror shall have 1/4" (0.6 mm) return concealing 1/4" (0.6 mm) tempered masonite backing. Mirror shall be furnished with mounting screws and finishing washers.

**Mirror shall be Model M50 \_\_\_\_\_ (insert width and height) of Faries-McMeekan, Inc., Elkhart, Indiana.**

- Special Notes:
1. Other sizes available as special order.
  2. All Faries-McMeekan framed mirrors are made to overall width & height.
  3. Faries-McMeekan mirrors are manufactured to a  $\pm$  tolerance of 1/8" (3.2 mm).
  4. To specify special sizes use Series number and width then height in inches. Ex. M50 1824.
  5. Provide 1" minimum clearance at bottom of mirror for engaging locking screws