




## Technical Data Sheet - M-93 Series Fixed Tilt Mirror

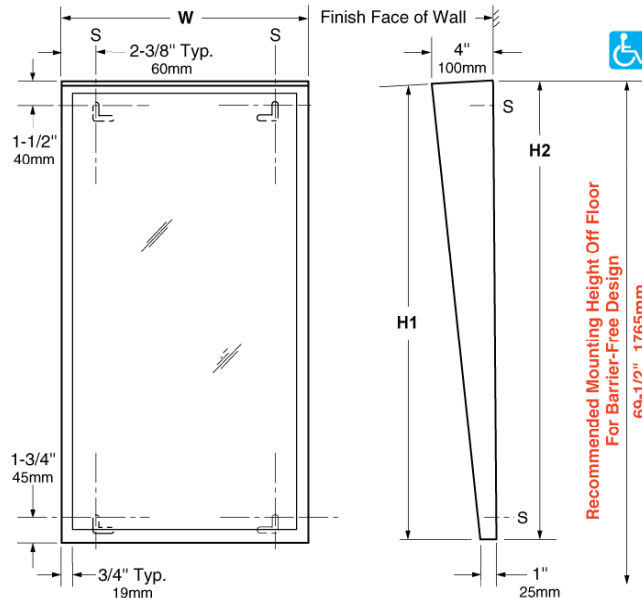

### Standard Sizes

| OVERALL SIZE<br>W x H  |
|------------------------|
| 16" x 30" (41 x 76 cm) |
| 18" x 24" (46 x 61 cm) |
| 18" x 30" (46 x 76 cm) |
| 18" x 36" (46 x 91 cm) |
| 24" x 30" (61 x 76 cm) |
| 24" x 36" (61 x 91 cm) |

### MATERIALS:

**Frame** - 18-8 S, type 304, heavy-gauge stainless steel, 3/4" x 3/4" (19 x 19 mm) with vertical grain satin finish. Tapers from 4" (100 mm) depth at top to 1" (25 mm) depth at bottom. Bevel design on front holds frame tightly against mirror. Corners are welded, ground and polished smooth. Galvanized steel back and inner stiffening frame is one-piece welded construction with slots for mounting screws and integral screw-head lock.

**Mirror** - No. 1 quality, 1/4" (0.6 mm) Float Glass selected for silvering, electrolytically copper-plated, guaranteed 15 years against silver spoilage. All edges protected by shock absorbing filler strips; back is protected by full shock-absorbing, water-resistant, non-abrasive 1/8" thick polystyrene padding.

**Concealed Wall Hanger** - 20 gauge (0.9 mm) prime galvanized steel.

### OPERATION:

Mirror is designed to provide full visibility for wheelchair patients in hospitals and nursing homes.

### INSTALLATION:

Mount vertically on wall with eight screws furnished by manufacturer, at points indicated by an S. Screws are to be located in wall with heads protruding 5/32" (4 mm) from finish face of wall. Hang mirror by hooking mounting screw slots in mirror back over the protruding screw heads and pulling down on mirror 1" (25 mm) until unit locks in place. 7/8" (22 mm) clearance is required at top of mirror for installation. For plaster or drywall on studs, provide concealed backing; backing must comply with local building codes. For other wall surfaces, provide fiber plugs or expansion shields for use with screws furnished, or provide 1/8" (3 mm) toggle bolts or expansion bolts.

### SPECIFICATION:

Mirror shall be frame with type 304 Stainless Steel with beveled front to hold frame tightly against mirror; corners are welded, ground and polished smooth; all exposed surfaces have satin finish with vertical grain. Reflective surfaces shall be guaranteed 15 years against silver spoilage and all edges protected by shock absorbing, water resistant, non-abrasive 1/8" thick polystyrene padding. Back and inner stiffening frame shall be galvanized steel, one-piece welded construction with slots for mounting screws and integral screw-head lock.

**Framed Mirror shall be model M93 \_\_\_\_\_ (insert width and height) of Faries-McMeekan, Inc., Elkhart, Indiana.**

### Special Notes:

1. Other sizes available as special order.
2. All Faries-McMeekan framed mirrors are made to overall width & height.
3. Faries-McMeekan mirrors are manufactured to a ± tolerance of 1/8" (3.2 mm).
4. To specify special sizes use Series number and width then height in inches. Ex. M93 1824

Illustrations and descriptions herein are applicable to production as of the date of the Technical Data Sheet.  
The manufacturer reserves the right to and does from time to time make changes and improvements in designs and dimensions.